


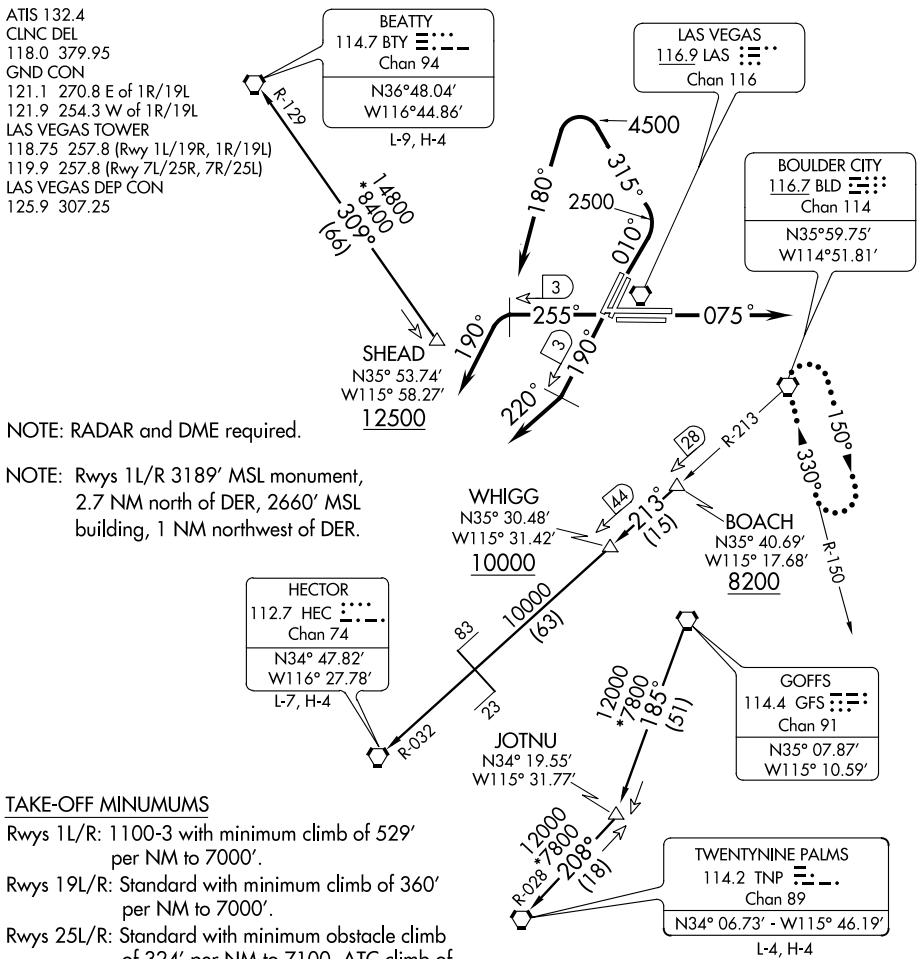

NOTE: RADAR and DME required.

NOTE: Rwy 1L/R 3189' MSL monument,
2.7 NM north of DER, 2660' MSL
building, 1 NM northwest of DER.

- TAKE-OFF MINIMUMS
- Rwys 1L/R: 1100-3 with minimum climb of 529' per NM to 7000'.
 - Rwys 19L/R: Standard with minimum climb of 360' per NM to 7000'.
 - Rwys 25L/R: Standard with minimum obstacle climb of 324' per NM to 7100, ATC climb of 360' per NM to 7000.
 - Rwys 7L/R: Standard with minimum ATC climb of 440' per NM to 7000'.

- TAKE-OFF OBSTACLE NOTES
- RWY 1L: Pole 450' from DER, 283' left of centerline, 38' AGL/2118' MSL.
Obstacle light on wind sock 248' from DER, 224' right of centerline, 50' AGL/2104' MSL.
Pole 1029' from DER, 715' left of centerline, 85' AGL/2124' MSL.
Tree 1536' from DER, 502' left of centerline, 100' AGL/2132' MSL.
 - RWY 1R: Sign 1331' from DER, 448' right of centerline, 60' AGL/2120' MSL
Building 599' from DER, 541' right of centerline, 70' AGL/2096' MSL

(NOTES CONTINUED ON FOLLOWING PAGE)

(NARRATIVE ON FOLLOWING PAGE) NOTE: Chart not to scale.

SW-4, 03 APR 2014 to 01 MAY 2014

SW-4, 03 APR 2014 to 01 MAY 2014